



Industrial Specialties Mfg.

An ISO 9001:2008 Certified Company

4091 S. Eliot St., Englewood, CO 80110-4396 • 303-781-8486 FAX: 303-761-7939 • www.industrialspec.com

20AC Series Couplings

Tubing Size 1/16" - 1/4"
1/8" Flow Thermal Plastic



These 1/8" flow size couplings are produced in a durable natural Acetal (POM) thermal plastic. They are resistant to most mild chemicals and are manufactured to be trouble free for many years of service. They are intuitive to use and make an audible click when coupled. 20AC couplings interconnect with all other 20PP and 20CB Series couplings as well as other similar industry thumb-latch type couplings.


Performance Ratings:

- Operating Pressure: Vacuum to 120psi; (8.3bar)
- Temperature: -40°F to 180°F; (-40°C to 82°C)
- Flow Capacity: 1/8" Size


Materials & Construction:

- Bodies & Terminations: Acetal (POM)
- Internal Valves: Acetal (POM)
- Internal Valve Springs: 316 Stainless Steel
- O-rings: FDA & NSF Grade Buna-N (others available)
- Thumb-latch: Stainless Steel
- External Springs & Pins: Stainless Steel

20AC Series Air Flow

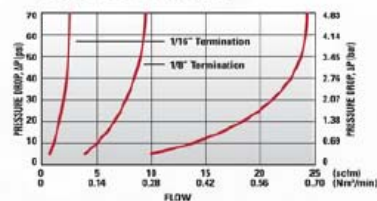

20AC Series Water Flow

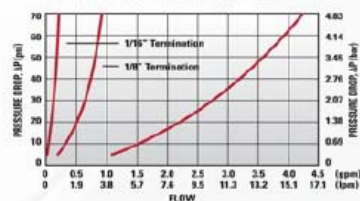

FLOW RATES

The data below shows liquid flow rates for LinkTech couplings. Each coupling combination was tested at 70°F (21°C).

C_v Values for 20AC Series Couplings

SOCKETS	20ACV-PB2-01	20AC-PB2-01	20ACV-PB2-02	20AC-PB2-02	20ACV-PB2-03	20AC-PB2-03	20ACV-PB2-04	20AC-PB2-04	20ACV-PB9-04	20AC-PB9-04	20ACV-PB1-02	20AC-PB1-02	20ACV-PB1-04	20AC-PB1-04	20ACV-PB4-04	20AC-PB4-04
20ACV-SB2-01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
20AC-S2-01	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
20ACV-SB2-04	0.03	0.03	0.16	0.22	0.16	0.22	0.21	0.26	0.17	0.23	0.19	0.25	0.21	0.25	0.24	0.27
20AC-S2-04	0.03	0.03	0.18	0.24	0.19	0.26	0.23	0.45	0.24	0.33	0.2	0.45	0.24	0.38	0.27	0.45
20ACV-SB3-02	0.03	0.03	0.14	0.17	0.14	0.18	0.15	0.19	0.15	0.19	0.18	0.18	0.15	0.18	0.15	0.19
20AC-S3-02	0.03	0.03	0.14	0.19	0.14	0.2	0.15	0.27	0.15	0.24	0.15	0.27	0.18	0.28	0.16	0.27
20ACV-SB3-04	0.03	0.03	0.16	0.22	0.16	0.22	0.21	0.26	0.17	0.23	0.19	0.26	0.21	0.26	0.16	0.25
20AC-S3-04	0.03	0.03	0.18	0.25	0.19	0.27	0.23	0.45	0.23	0.34	0.2	0.45	0.25	0.45	0.26	0.45
20ACV-SB8-04	0.03	0.03	0.16	0.2	0.16	0.21	0.17	0.22	0.17	0.21	0.17	0.21	0.17	0.21	0.18	0.22
20AC-S8-04	0.03	0.03	0.16	0.25	0.17	0.3	0.18	0.4	0.18	0.4	0.16	0.4	0.18	0.36	0.21	0.4
20ACV-SB1-02	0.03	0.03	0.16	0.24	0.17	0.25	0.2	0.28	0.18	0.27	0.2	0.26	0.2	0.29	0.24	0.26
20AC-S1-02	0.03	0.03	0.16	0.25	0.17	0.3	0.19	0.5	0.18	0.4	0.2	0.5	0.2	0.5	0.24	0.5
20ACV-SB1-04	0.03	0.03	0.17	0.25	0.18	0.25	0.23	0.3	0.19	0.3	0.21	0.27	0.23	0.28	0.24	0.29
20AC-S1-04	0.03	0.03	0.18	0.26	0.19	0.3	0.24	0.5	0.21	0.4	0.2	0.5	0.25	0.51	0.26	0.5

Specific coupling combination flow rates can be determined by using this formula:



$$Q = C_v \sqrt{\frac{\Delta P}{S}}$$

Q = Flow rate in gallons per minute
C_v = Average flow rates (see chart)
ΔP = Pressure drop across coupling (psi)
S = Specific gravity of liquid.

Panel Mount Dimensions

	PANEL OPENING	MAX PANEL THICKNESS	MIN PANEL THICKNESS
SOCKETS	Per Drawing	0.5"	0.05"
PLUGS	0.5"	0.3"	0.05"

PANEL NUT HEX SIZE	PANEL NUT THREAD
5/8"	1/2" - 24UNS

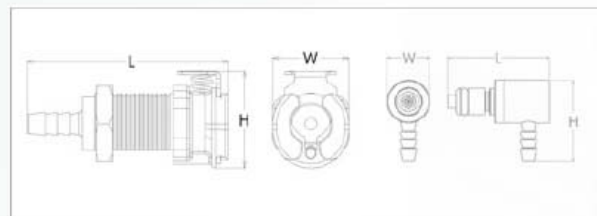

Reference Dimensions: L = Length, W = Width, H = Height

Worldwide Suppliers of Miniature Fluid and Pneumatic Circuitry Components