



Industrial Specialties Mfg.

An ISO 9001:2008 Certified Company

4091 S. Eliot St., Englewood, CO 80110-4396 • 303-781-8486 FAX: 303-761-7939 • www.industrialspec.com

20CB Series Couplings

Tubing Size 1/8" - 1/4"
1/8" Flow Chrome Brass



Produced in food grade chrome plated brass, these 1/8" flow size couplings are more durable and withstand higher pressures. They are available with internal shut-off valves or straight through. All 20CB couplings interconnect with all other 20AC and 20PP couplings as well as other similar industry thumb-latch type couplings.


Performance Ratings:

- Operating Pressure: Vacuum to 250psi; (17.3bar)
- Temperature: -40°F to 180°F; (-40°C to 82°C)
- Flow Capacity: 1/8" Size


Materials & Construction:

- Bodies & Terminations: Food Grade Chrome/Brass
- Internal Valves: Acetal (POM)
- Internal Valve Springs: 316 Stainless Steel
- O-rings: FDA & NSF Grade Buna-N (others available)
- Thumb-latch: Stainless Steel
- External Springs & Pins: Stainless Steel

20CB Series Air Flow

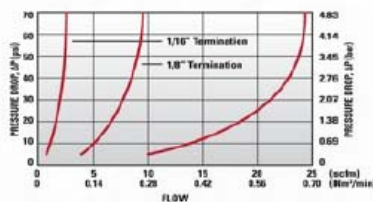

20CB Series Water Flow

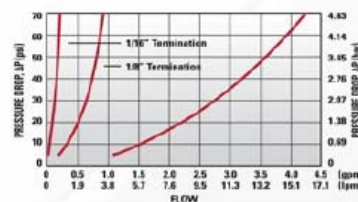

FLOW RATES

The data below shows liquid flow rates for LinkTech couplings. Each coupling combination was tested at 70°F (21°C).

C_v Values for 20CB Series Couplings

SOCKETS	20CBV-PB2-02	20CB-PB2-02	20CBV-PB2-03	20CB-PB2-03	20CBV-PB2-04	20CB-PB2-04	20CBV-PB9-04	20CB-PB9-04	20CBV-PB1-02	20CB-PB1-02	20CBV-PB1-04	20CB-PB1-04	20CBV-PB4-04	20CB-PB4-04
20CBV-SB2-04	0.16	0.22	0.16	0.22	0.21	0.26	0.17	0.23	0.19	0.25	0.21	0.25	0.24	0.27
20CB-S2-04	0.18	0.24	0.19	0.26	0.23	0.45	0.24	0.33	0.2	0.45	0.24	0.38	0.27	0.45
20CBV-SB3-02	0.14	0.17	0.14	0.18	0.15	0.19	0.15	0.19	0.18	0.18	0.15	0.18	0.15	0.19
20CB-S3-02	0.14	0.19	0.14	0.2	0.15	0.27	0.15	0.24	0.15	0.27	0.18	0.28	0.16	0.27
20CBV-SB3-04	0.16	0.22	0.16	0.22	0.21	0.26	0.17	0.23	0.19	0.26	0.21	0.26	0.16	0.25
20CB-S3-04	0.18	0.25	0.19	0.27	0.23	0.45	0.23	0.34	0.2	0.45	0.25	0.45	0.26	0.45
20CBV-SB8-04	0.16	0.2	0.16	0.21	0.17	0.22	0.17	0.21	0.17	0.21	0.17	0.21	0.18	0.22
20CB-S8-04	0.16	0.25	0.17	0.3	0.18	0.4	0.18	0.4	0.16	0.4	0.18	0.36	0.21	0.4
20CBV-SB1-02	0.16	0.24	0.17	0.25	0.2	0.28	0.18	0.27	0.2	0.26	0.2	0.29	0.24	0.26
20CB-S1-02	0.16	0.25	0.17	0.3	0.19	0.5	0.18	0.4	0.2	0.5	0.2	0.5	0.24	0.5
20CBV-SB1-04	0.17	0.25	0.18	0.25	0.23	0.3	0.19	0.3	0.21	0.27	0.23	0.28	0.24	0.29
20CB-S1-04	0.18	0.26	0.19	0.3	0.24	0.5	0.21	0.4	0.2	0.5	0.25	0.51	0.26	0.5

Specific coupling combination flow rates can be determined by using this formula:



$$Q = C_v \sqrt{\frac{\Delta P}{S}}$$

- Q = Flow rate in gallons per minute
- C_v = Average flow rates (see chart)
- ΔP = Pressure drop across coupling (psi)
- S = Specific gravity of liquid.

Panel Mount Dimensions

	PANEL OPENING	MAX PANEL THICKNESS	MIN PANEL THICKNESS
SOCKETS	0.5"	0.5"	0.05"
PLUGS	0.5"	0.3"	0.05"

PANEL NUT HEX SIZE	PANEL NUT THREAD
5/8"	1/2" - 24 UNS

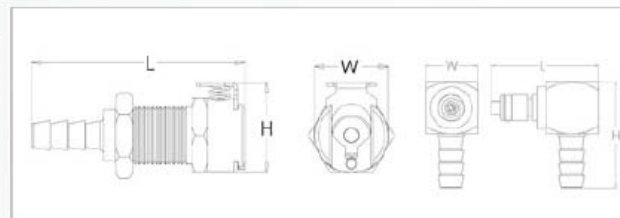

Reference Dimensions: L = Length, W = Width, H = Height

Worldwide Suppliers of Miniature Fluid and Pneumatic Circuitry Components